


SPECIFICATIONS




CBCF 50

Blast Chiller/Freezer Upright Series

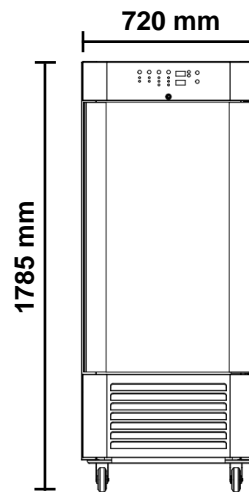

Options:

- Extra Shelves
- Extra Slides
- ST/ST Back
- Helicoil Cable
- HFO Blast Chiller

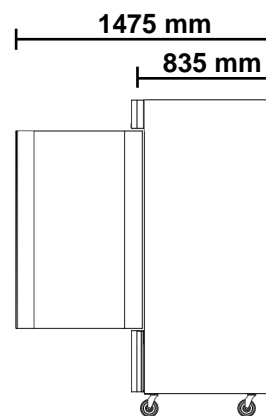

SPECIFICATIONS

Refrigeration system:	Electronic controlled, self-contained, bottom mounted, refrigeration unit
Refrigerant:	R404a / 1700g
Nominal capacity:	3490 Watts @ -5°C SST
Cabinet internal volume:	50 kilogram capacity
Insulation:	60mm thick, high density 0 ODP injected polyurethane insulation
Cabinet temperature range:	+90°C to +3°C in 90mins & +90°C to -18°C in 240 mins (43°C ambient)
Drainage:	Waste Heat Vaporiser located in service comp. (no plumbing required)
Electrical:	230 Volts a.c. 50 Hz, 14.0 Amps
kWh/24 hr :	N/A
Internal door opening size:	1 door opening: Accepts full 1/1 GN pans (325mm wide x 530mm deep)
Doors:	Solid stainless steel, self-closing doors
Shelves:	15 x adjustable tray slides per door
Weight:	188 kg

CABINET DIMENSIONS

	External	Internal
Width:	720mm	600mm
Depth:	835mm	615mm
Height:	1650mm*	1065mm
Floor area:	0.60m ²	

* Height excludes castors or legs